



medical **ECONET**
GERMANY



PRIMUS | Short-Body

Total body DXA bone densitometer with Fan Beam Technology


- Very high precision and short scan time: Femur (19 sec.)
- Total Body Assessment: BMD, T-score, Z-score, BMI, Body composition (Fat, Lean, BMC)
- LVA (Lateral Vertebral Assessment) to detect lateral vertebral fractures
- Hip analysis to evaluate the proximal femur geometric
- Pediatric function to measure children's BMD
- Orthopedic function - automatic exclusion of hip prostheses, metal fastenings and artifacts
- FRAX - 10 year fracture risk analysis
- Friendly Touch operating panel
- Multi Color mapping analysis: RCM, BCM, OCM
- High Resolution Image
- Multi language support
- Very low radiation

Specifications

Scan type	FAN beam
Sites and time	Total body (8,07 min, depending on height) AP spine (29 sec) Femur (19 sec) Forearm (21 sec) Lateral spine (44 sec) LVA (144 sec)
Analysis	BMD, T-score, Z-score, BMI, Body composition (Fat, Lean, BMC)
Pediatric function	included
Orthopedic function	included
FRAX (10 year fracture risk analysis)	included
Measuring method	Non-stop scan (AP Spine, Dual Femur)
Region of Interest	AUTO ROI
Radiation Dose	<0,1 mSv per 1 time
Database	DB back up and restore
Scan area	Total body: 58 x 166 cm Femur: 12 x 18 cm Spine: 16 x 19,2 cm
Dimensions	210 x 107 x 124 cm
Weight	165 kg
Environmental requirements	Ambient temperature: 10 – 40°C Humidity: 20 – 80%, non-condensing Power: 100 ~120VAC. 50~60Hz/220~240VAC
Operating System	Windows 7, 8, 10
DICOM / PACS	included
Detector	CZT (Cadmium Zinc Telluride)




Software

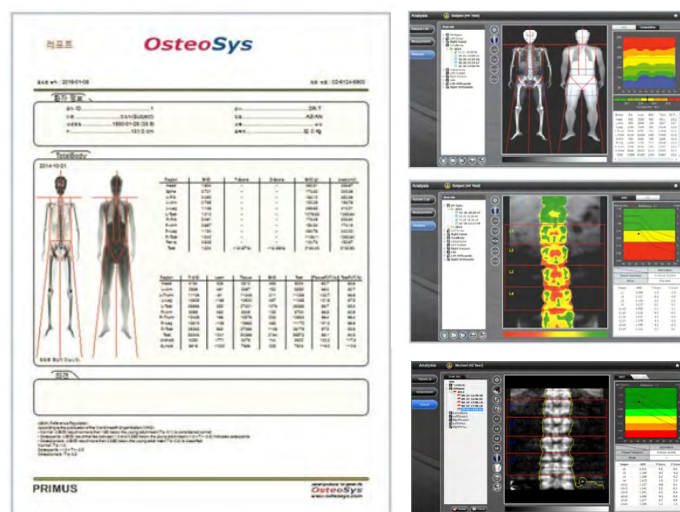

Dimensions

210x107 x 124 cm, about 165 kg

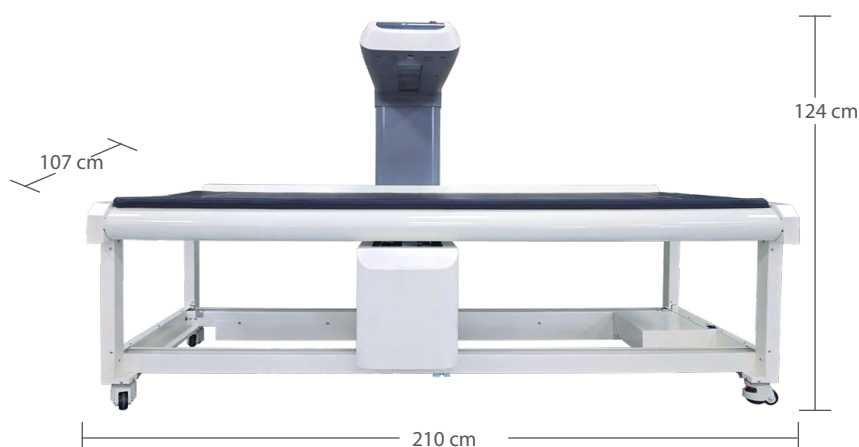

CE 0120

medical **ECONET**

Im Erlengrund 16, 46149 Oberhausen - Germany

Distributor
IBS
GROUPE
Turnkey Supplier

*All specifications are subject to change without notice

ME-ENG-H-25-PRIMUSSB-09-24